

Mini Stealth

R65 3-LED Directional Warning Lamp (Hood Mount)



FEATURES

- C-clamp base for versatile discreet mounting.
- Multi-Voltage Input 12~24VDC.
- Built-in 5 Selectable Flash Patterns.
- LEDs rated to 100,000 hours of operation.
- Non-volatile memory - recalls last flash pattern used at power up.
- Multi-units synchronization in simultaneous or alternating flash.
- Reverse polarity protection.
- Weatherproof and vibration resistant design for internal or external use.
- Heat-dissipating aluminum base for long hour operation.

SPECIFICATIONS

Meets: ECE R65 (XA1, XB1), ECE R10

IP Code: IPX7

Bulb: 1W LED x 3pcs

Warning Patterns: 5 Flash Patterns

Operating Voltage: 12~24VDC

Avg. Current: 0.34A @12VDC / 0.17A @24VDC
(varies with flash pattern)

Avg. Power: 4.05 Watts (varies with flash pattern)

Max. Current: 0.68A @12VDC / 0.34A @24VDC

Max. Power: 8.1 Watts

Wires: Red-Vcc: 97cm (20AWG)

Black-GND: 97cm (20AWG)




Yellow-Flash Patterns & Sync: 97cm (20AWG)

Fuse Recommended: 1A

Multi-Unit Synchronization: Over 15

Available in: BLUE, AMBER

DIMENSIONS

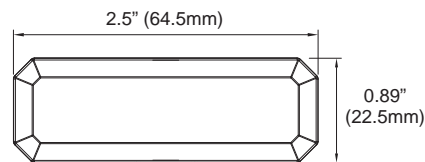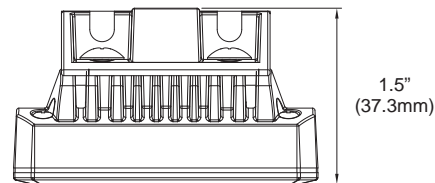

PART NO.

M13-0013A-00.....AMBER LED (XA1)

M13-0013B-00.....BLUE LED (XB1)

FLASH PATTERN

Flash Patterns			
1	Single (R65)	4	Quad (2Hz)
2	Double (R65)	5	Steady
3	Triple (R65)		