

# Mini Stealth

## R65 3-LED Directional Warning Lamp (Surface Mount)



### FEATURES

- Super low-profile thickness for discreet mounting.
- Multi-Voltage Input 12~24VDC.
- Built-in 5 Selectable Flash Patterns.
- LEDs rated to 100,000 hours of operation.
- Non-volatile memory - recalls last flash pattern used at power up.
- Multi-units synchronization in simultaneous or alternating flash.
- Reverse polarity protection.
- Weatherproof and vibration resistant design for internal or external use.
- Heat-dissipating aluminum base for long hour operation.

### SPECIFICATIONS

**Meets:** ECE R65 (XA1, XB1), ECE R10

**IP Code:** IPX7

**Bulb:** 1W LED x 3pcs

**Warning Patterns:** 5 Flash Patterns

**Operating Voltage:** 12~24VDC

**Avg. Current:** 0.34A @12VDC / 0.17A @24VDC  
(varies with flash pattern)

**Avg. Power:** 4.05 Watts (varies with flash pattern)

**Max. Current:** 0.68A @12VDC / 0.34A @24VDC

**Max. Power:** 8.1 Watts

**Wires:** Red-Vcc: 20cm (20AWG)

Black-GND: 20cm (20AWG)


Yellow-Flash Patterns & Sync: 20cm (20AWG)

**Fuse Recommended:** 1A

**Multi-Unit Synchronization:** Over 15

**Available in:** BLUE, AMBER

### DIMENSIONS

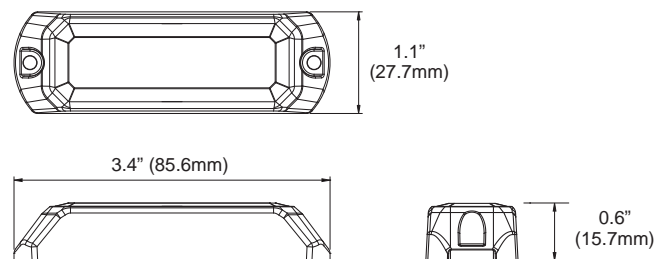

### PART NO.

**M14-0013A-00**.....AMBER LED (XA1)

**M14-0013B-00**.....BLUE LED (XB1)

### FLASH PATTERN

Flash Patterns			
1	Single (R65)	4	Quad (2Hz)
2	Double (R65)	5	Steady
3	Triple (R65)		